




Double BALL BEARINGS CO, LTD

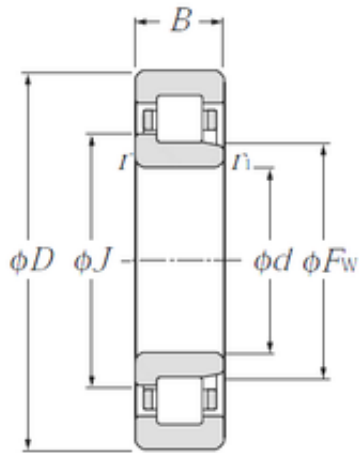

30 mm x 90 mm x 23 mm NTN NJ406
cylindrical roller bearings

Bearing No. NJ406

NJ406 Bearing 2D drawings and 3D CAD models

Size	30x90x23 mm
Bore Diameter	30 mm
Outer Diameter	90 mm
Width	23 mm
d	30 mm
Fw	45 mm
D	90 mm
B	23 mm
C	23 mm
r min.	1,5 mm
r1 min.	1,5 mm
J	50,5 mm
Weight	0,751 Kg
Basic dynamic load rating (C)	62,5 kN
Basic static load rating (C0)	55 kN
(Grease) Lubrication Speed	7 300 r/min
E	73 mm
F	45 mm
d1	50.5 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	CN
Mass (without HJ ring)	0.78 kg
Dynamic load, C	62.5 kN
Static load, C0	55 kN



Double BALL BEARINGS CO, LTD

Fatigue limit load, Cu	6.7 kN
Nlim (oil)	8,500 rpm
Nlim (grease)	7,300 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	3.98 Hz
Characteristic outer ring frequency, BPF0	3.43 Hz
Characteristic inner ring frequency, BRFI	5.57 Hz
da min	38 mm
da max	44 mm
dc min	52 mm
Da max	82 mm
ra max	1.5 mm
Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.762
EAN	4547359124460
Product Group	B04144
Bore Profile	Straight
Cage Material	Steel
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - One Side
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and



Double BALL BEARINGS CO, LTD

	Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	1 Rib Inner Ring 2 Rib Outer Ring Cage On Outer Ring ID
Long Description	30MM Bore; Straight Bore Profile; 90MM Outside Diameter; 23MM Width; Steel Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - One Side Separable; No Snap Ring; Relubricatable; C0-Medium Intern
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	NJ406
Weight / LBS	1.682
Bore	1.181 Inch 30 Millimeter
Width	0.906 Inch 23 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter