




Double BALL BEARINGS CO, LTD

40 mm x 80 mm x 18 mm NTN 6208ZZ deep groove ball bearings

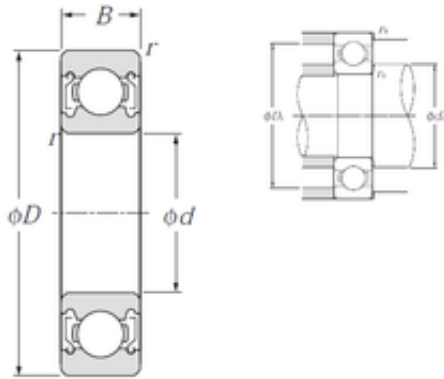

Bearing No. 6208ZZ

6208ZZ Bearing 2D drawings and 3D CAD models

Size	40x80x18 mm
Bore Diameter	40 mm
Outer Diameter	80 mm
Width	18 mm
d	40 mm
D	80 mm
B	18 mm
C	18 mm
rn	0,5 mm
r min.	1,1 mm
da min.	46,5 mm
da max	51 mm
Da max.	73,5 mm
ra max.	1 mm
Weight	0,366 Kg
Basic dynamic load rating (C)	29,1 kN
Basic static load rating (C0)	17,8 kN
(Grease) Lubrication Speed	8 700 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359004724
Product Group	B00308



Double BALL BEARINGS CO, LTD

Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Other Features	Deep Groove Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.807
Outer Race Width	0.709 Inch 18 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter
Bore	1.575 Inch 40 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer Item Number	6208ZZ/2AU1
bore diameter:	40 mm
precision rating:	ISO Class 0



Double BALL BEARINGS CO, LTD

outside diameter:	80 mm
finish/coating:	Uncoated
overall width:	18 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	18 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	18 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	8700 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	10000 RPM
dynamic load capacity:	29100 N
series:	62
static load capacity:	17800 N
manufacturer product page:	Click here